

# HC Series High Capacity Wound Filter Cartridges



Ask us about HC Series  
filters certified to NSF/  
ANSI 61!

Delta Pure HC “high capacity” series string wound filter cartridges provide excellent filtration for fluids with a wide particle size distribution. The HC series filters are wound with two zones in order to provide longer filter life with challenging fluids. A more open pre-filtration section serves to protect the downstream section and remove larger particles, while a tighter final filter section provides removal of smaller particulates. The rating of each zone is specified in order to provide a filter uniquely tailored to process requirements. Delta Pure offers these depth filters with a choice of filtration media, support cores, and materials to ensure process compatibility. Precision winding geometry provides consistent removal-efficiency. Ratings are available from 0.5µm to 200 µm. Optional core covers allow added contaminant removal assurance. Cartridges are available in continuous lengths from 4” to 72” and diameters to 4 ½”. End fitting options allow installation into most filter housings.



*HC Series string wound filter cartridges provide longer life by virtue of their dual-zone construction.*

## Benefits

- Wide range of materials to ensure process compatibility
- Variety of sizes and configurations to ensure proper sizing, fit and sealing
- High sediment-holding-capacity for longer time between filter cartridges changes
- Continuous lengths up to 72” (183cm)
- Technical support
- Prompt deliveries

## Applications

- Potable water (NSF/ANSI 61 certified versions available)
- Process water
- Pre-filtration for membrane/ reverse osmosis (RO) systems
- Food and beverage
- Chemicals, acids, bases
- Oils, fuels and solvents
- Fracking, completion and brine fluids
- Produced water and waste water

## Precision Wound Filter Cartridges



PLC controlled processes enable precise and repeatable winding of each filter zone.

### Specifications

Cartridge ID:  
 1" (2.6 cm) nominal std.  
 1.22" (3.1cm) and 1.5" (3.8 cm) optional

Cartridge OD:  
 2" (5cm) to 4 1/2" (11.4 cm)


Length  
 3" (7.6 cm) to 72" (183 cm)  
 special lengths available

Efficiency: 90% nominal; 80% below 3 micron

Recommended max Change-Out Differential Pressure  
 30 PSID (2 bar)

Maximum Differential Pressure  
 60 PSID (4 bar)

### Pressure Drop vs. Flow Rate (Polypropylene, Polyester and Nylon Media)

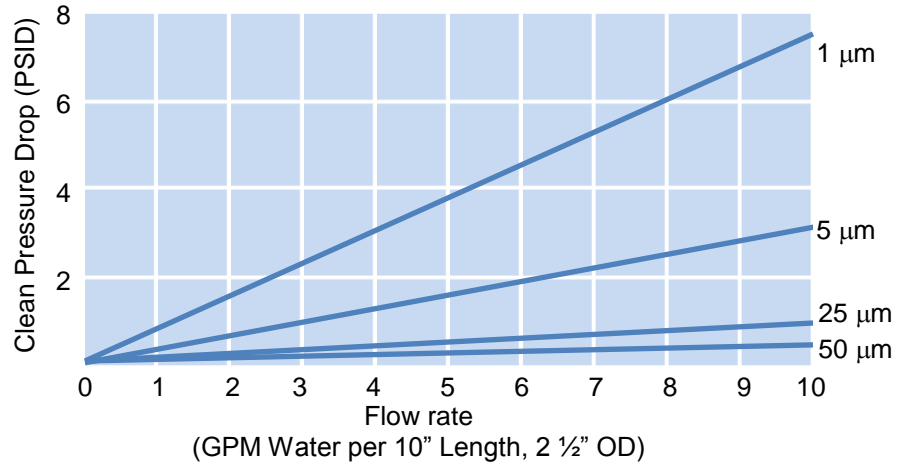

Note: Please consult factory for data on other media and fluids.

Max Temperature	Polypro	Polyester	Tin	SST Core
Media	Core	Core	Core	Core
Polypropylene	180 F	180 F	180 F	180 F
Cotton	180 F	250 F	250 F	250 F
Acrylic	180 F	250 F	250 F	250 F
Rayon	180 F	275 F	275 F	275 F
Nylon	180 F	275 F	275 F	275 F
Polyester	180 F	300 F	300 F	300 F
Fiberglass	180 F	300 F	400 F	750 F

2<sup>3</sup>/<sub>8</sub>" OD – 2 1/2" OD Box Quantities: 10" – 40/box; 20", 30", 40", 50" – 20/box  
 4 1/2" OD Box Quantities: 10" – 10/box; 20" – 5/box

### Model/Code Ordering Information

CARTRIDGE TYPE	MICRON RATING	FILTER MEDIA	LENGTH INCHES	CORE TYPE	OUTSIDE DIAMETER*	OPTIONS
HC – High Capacity Wound Filter Cartridge	Downstream / Upstream	01-FDA Polypropylene*	3.75	1 - 1" ID Polypropylene	A-2"	N - polyester core cover
	0.5	02-Fibrillated Polypropylene	4	2 - 1" ID Glass Filled Polypropylene	B-2 1/4"	NF- glass nonwoven core cover; acrylic resin bonded
	1	03-Industrial Polypropylene	4.75	3 - 1" ID Tinned Steel	C-2 3/8"	NN - nylon core cover
	2	04- Natural Cotton + Polyester	5	4 - 1" ID 304 SST	D-2 1/2"	Y - polypropylene core cover
	3	05- White Cotton	6	6 - 1" ID 316 SST	E-2 5/8"	2SP - 222 w/ plug
	5	06- FDA Bleached Cotton	9.75	7 - 1" ID Nylon	G-3"	2SD - 222 w/ disc
	10	09- Rayon	10	8 - 1.22" ID Polypropylene	H-4"	2SF - 222 w/ fin
	15	11- Nylon	12	9 - 1.5" ID Polypropylene	I- 4 1/4"	6SP - 226 w/ plug
	20	13-Polyester	12.5	10 - 1.5" ID tin steel	J-4 1/2"	6SD - 226 w/ disc
	25	14-Acrylic	19.5	11 - 1.5" ID 304 SSt		6SF - 226 w/ fin
	30	15- Glass Fiber	20	12 - 1.75" ID Polypropylene		E - Extended Core
	50	18- Polyphenylene Sulfide PPS	24.5		*nominal diameters	EC - end caps PVC
	75	20 – Antimicrobial Polypropylene	29.25			ECP - end caps polypro
	100	21- Heat resistant meta-aramid	30			P- plug in one end
	125	22- Nylon 6	36			SC - Sock Cover
	150	23 -EcoWound™ filter **	39			SPR- polypro spring
	200		40			
			50			
			72			

\* Filter versions certified to ANS/NSF 61 are available – contact us.

\*\* Media code 33 contains recycled polyester, cotton and polypropylene.

Example: HC-5/50-03-20-1-D 50 Micron over 5 Micron, Industrial Polypropylene Medium, 20" Length, 1" ID Polypropylene Core, 2 1/2" OD